STANDARD

MH1000

HORIZONTAL WASHING MACHINE FROM 1000 / 6 BRUSHES

EMAR GLASS

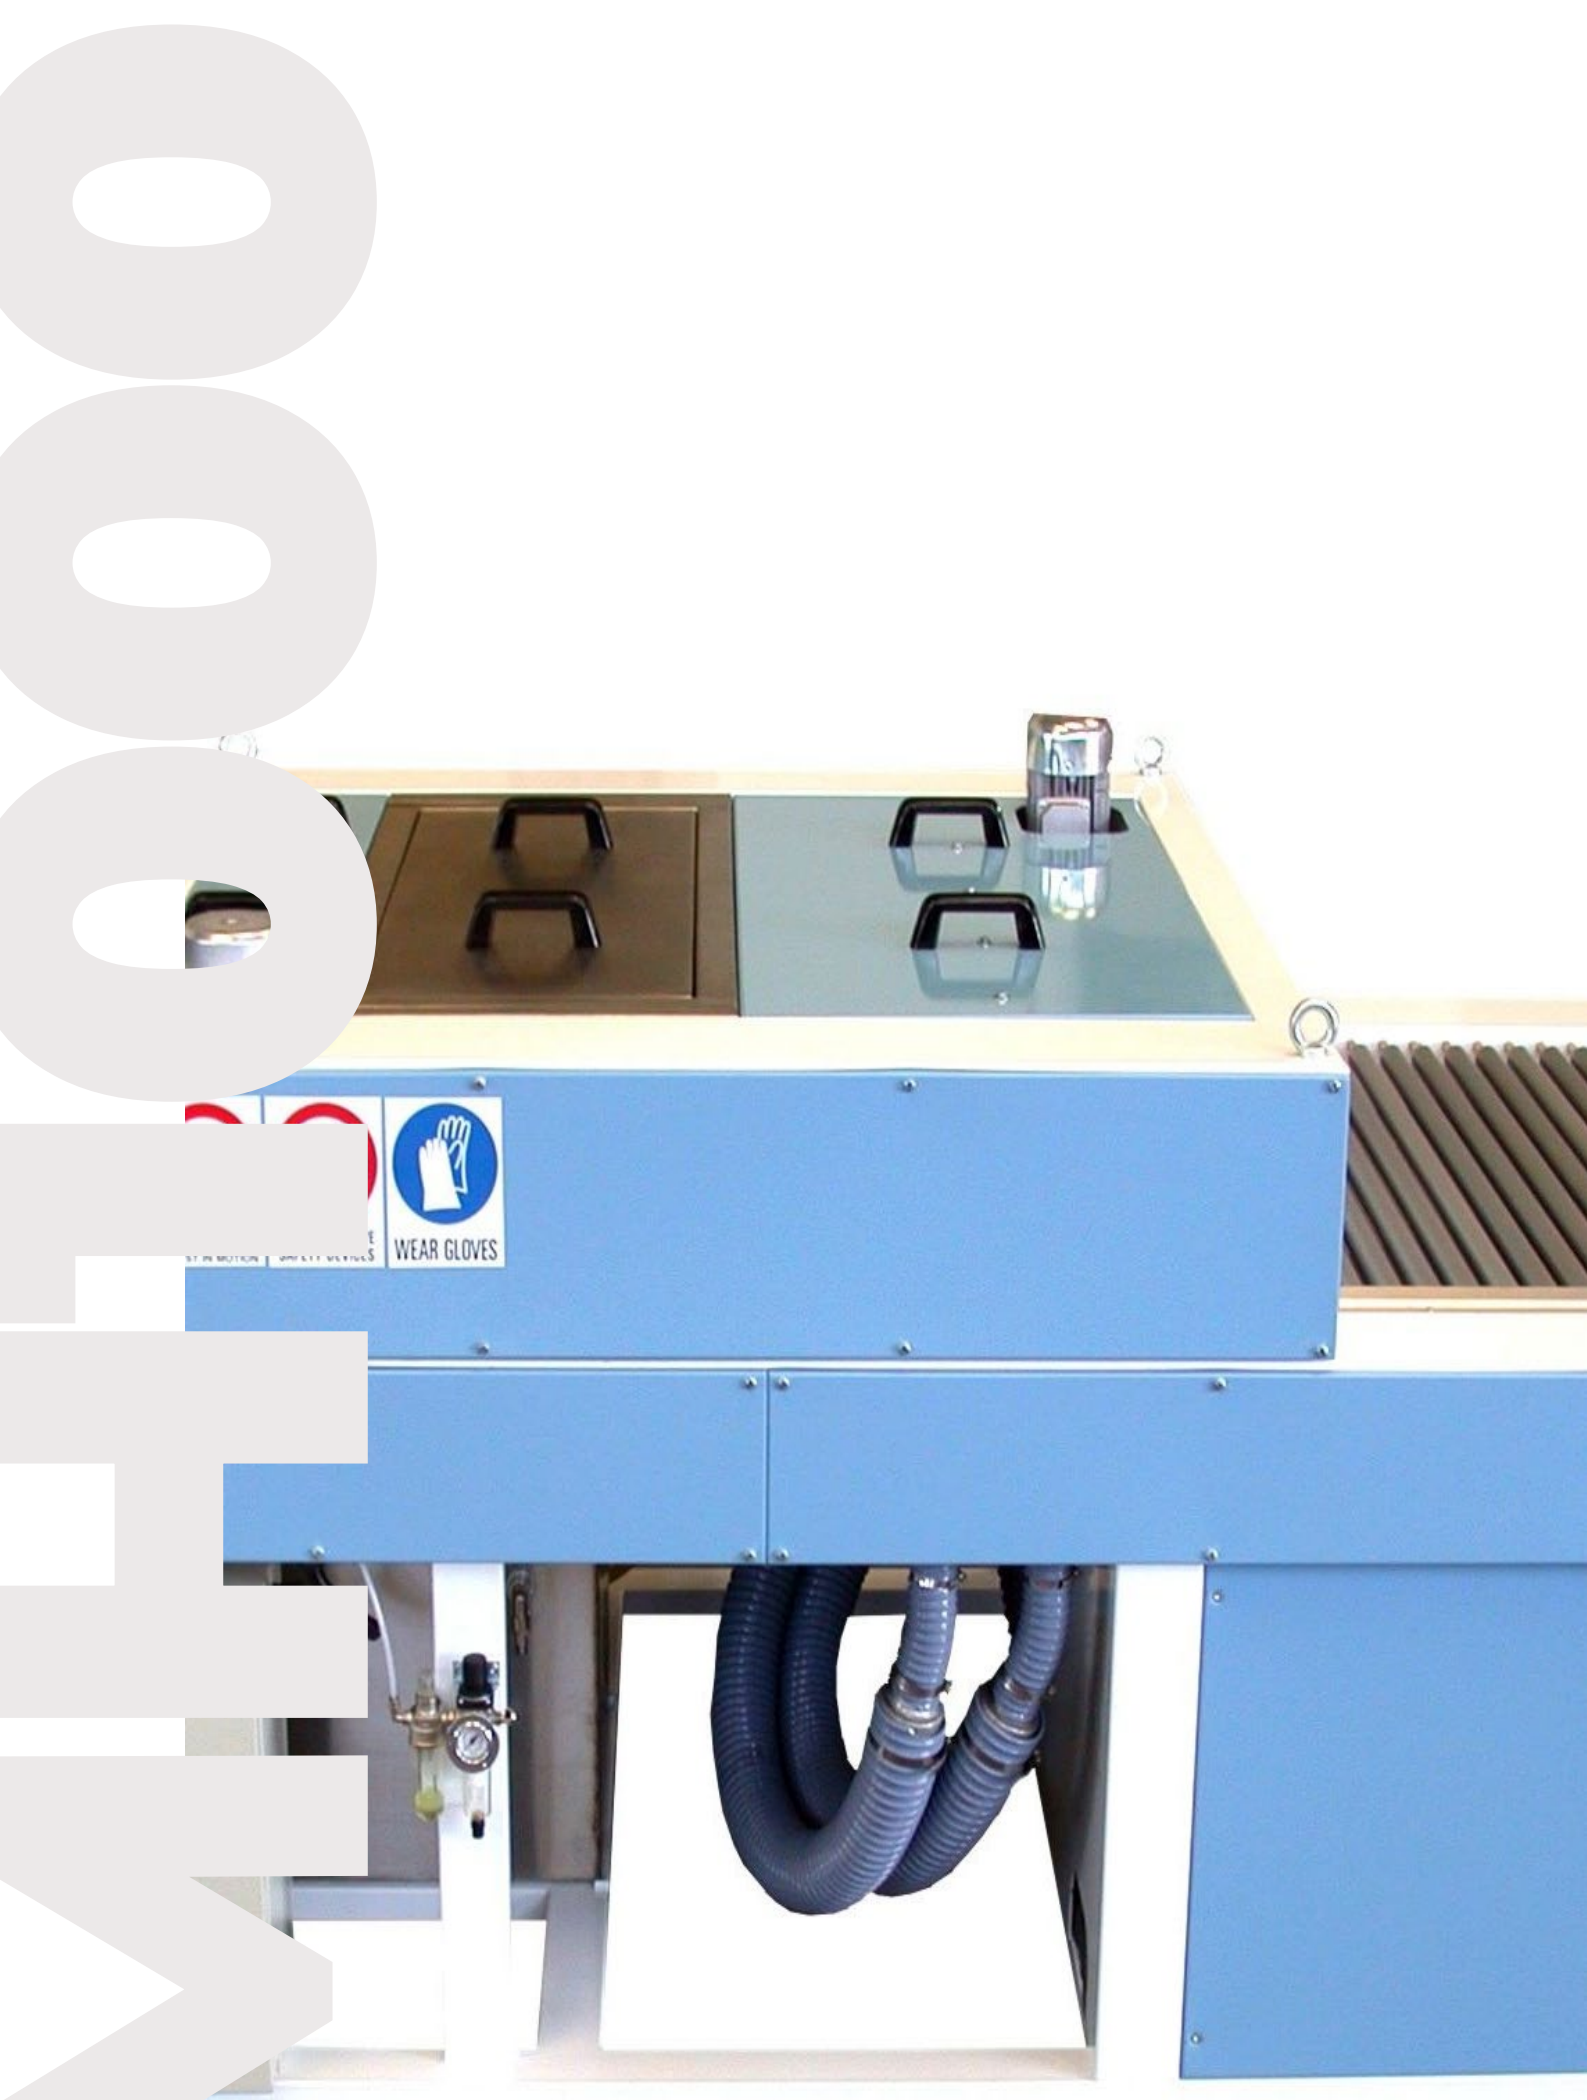
WEAR GLOVES

MH1000

Mod. **MH1000**

HORIZONTAL STANDARD
FROM 1000 / 6 BRUSHES

- *The washing machine is made up of an input and output module of 1.5 m, the transport of the glass occurs via a system of anti-cut rollers connected to each other by stainless steel chains and self-adjusting brass supports.*
- *The body of the washing machine is made of powder-coated stainless steel.*
- *All components in contact with water are corrosion resistant.*
- *The machine is equipped with 6 independent brushes with a diameter of 160 mm with steel shafts and aluminum supports.*
- *The water management unit consists of one washing area with tank, pump, filters and internal parts in stainless steel.*
- *Thanks to the shape of the tank, water consumption has been reduced to a minimum reusing wastewater from one sector to another.*

EMAR GLASS

MH1000

- *Possibility of connecting the last rinse area directly to the demineralizer.*
- *The thermostat-controlled heating system is standard over the entire range.*
- *Drying is done by a fan mounted in an insulated box to reduce noise, connected to a distributor designed not to vary the air flow to the 4 blowers of the machine.*
- *The working speed is adjustable and controlled exclusively by electronic systems to keep the torque constant even with different glass sizes.*
- *The machine, as standard, has been set up for connection to other work modules.*

EMAR GLASS

MH1000

ALWAYS CONNECTED

All automatic lines have the possibility of being connected to our monitoring center simply by connecting the line to the internet, with the following advantages:

- Possibility of remote troubleshooting
- Reduction of machine downtime
- Instant control of the aging of electronic components
- Possibility of excluding sensors to continue production while waiting for a replacement (provided it does not compromise the operator's safety)

.

EMAR GLASS

MH1000

TECNICAL SPECIFICATIONS

Power supply	**400 Vac 3-phase + Neutral 50 Hz**
Total consumption	**10 kW 400 Vac 50 Hz**
Fan motor	**1 x 7,5 kW 400 Vac 3-phase 50 Hz**
Washing zones	**1 with recycling pump and filter**
Rinsing zones	**1 with demineralizer connection**
Washing brushes	**6 brushes of 50 mm**
Drying area blowers	**2 above and 2 below**
Minimum washable glass	**100 x 100 mm**
Washable thickness	**From 2 to 10 mm (self-adjustable)**
Working speed	**From 2 to 5 m/minute**
Height	**1.360 mm**
Length	**3.000 mm**
Width	**1.600 mm**
Weight	**1.100 kg**

We recommend that water supplied to the washing machine has the following characteristics:

Conductivity	= less than 10 uS (microSiemens)
Hardness total	= less than 5° F (gradi Francesi)
Salt content	= less than 5 mg/L
Chloride	= less than 5 mg/L
Iron	= less than 0,05 ppm
Torbidity	= less than 0,5 ftu

NB. If the water values are higher than those recommended, the glass washing results may be compromised. If necessary, upon request we can provide equipment for cleaning the water.

MH1000

CONTROLLED TRASPORTATION

The system adopted allows the glass to always be kept adherent to the moving rollers. All this thanks to an innovative inverter-controlled type of transport.

.

EASY MAINTENANCE

Thanks to the type of construction, maintenance and cleaning are convenient, easy and quick.

NOISE REDUCTION

A fan for drying has been mounted in the insulated output module to reduce noise with a distributor to manage the air flow, and therefore obtain perfect drying. The cleanness of the air is guaranteed by a removable filter.

EMAR GLASS

MH1000

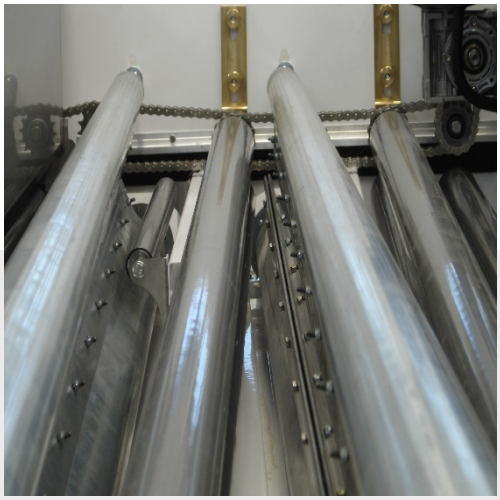

SELF-ADJUSTING OPENING

The transportation system adapts to the thickness of the glass via supports specially designed to reduce pressure on the glass.

LONG-LASTING BRUSHES

The washing area is equipped with 6 completely independent brushes. The shape of the bristles and the constant distribution of water guarantee a long life.

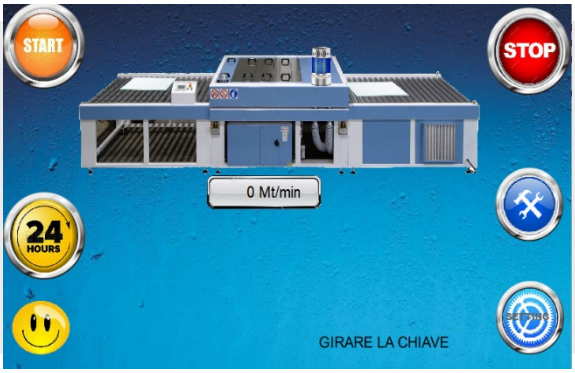

TOUCH SCREEN COMMANDS

The EASY TOUCH control panel is simple and intuitive and allows the operator to manage the entire line and control all the parameters of the machine. Thanks to this system the machine can be connected to our headquarters for maintenance and any machine downtime resolutions.

EMAR GLASS

MH1000

OPTIONALS

LOW E BRUSHES

These type of brushes have special bristles that allow you to work with more delicate glass. They are complete components with a stainless-steel shaft.

WATER HEATING

The heating system is composed of a powerful resistance (4.5 kW 400 Vac 3-phase) controlled by an adjustable thermostat.



MACHINE OPENING 2-24 mm

The machine can process glass up to 24 mm thick thanks to the inclusion of a pneumatic system that manages thicknesses from 2 to 12 mm and from 12 to 24 mm.

EMAR GLASS

MH1000

OPENING FOR MAINTENANCE

Thanks to the movement system adopted, it is possible to open the machine up to 350 mm allowing the possibility to carry out maintenance without having to dismantle any components.

La EMAR s.r.l. si reserves the right to modify the contents of this brochure at any time.

EMAR GLASS

MH1000

LAYOUT

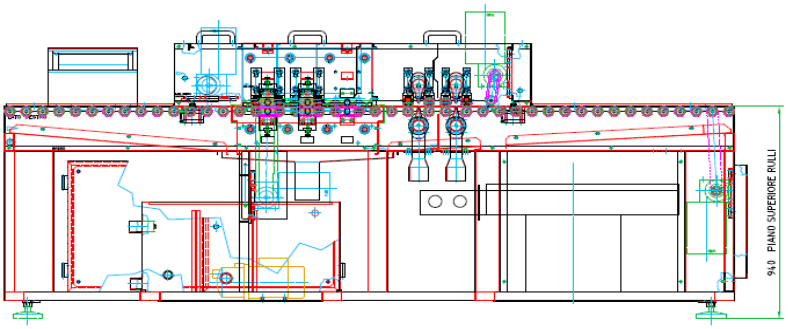

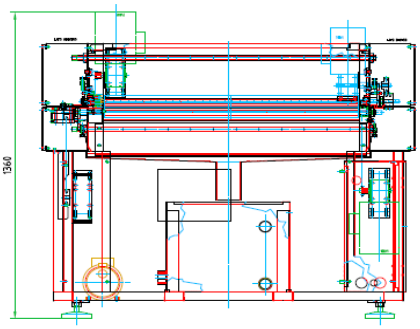

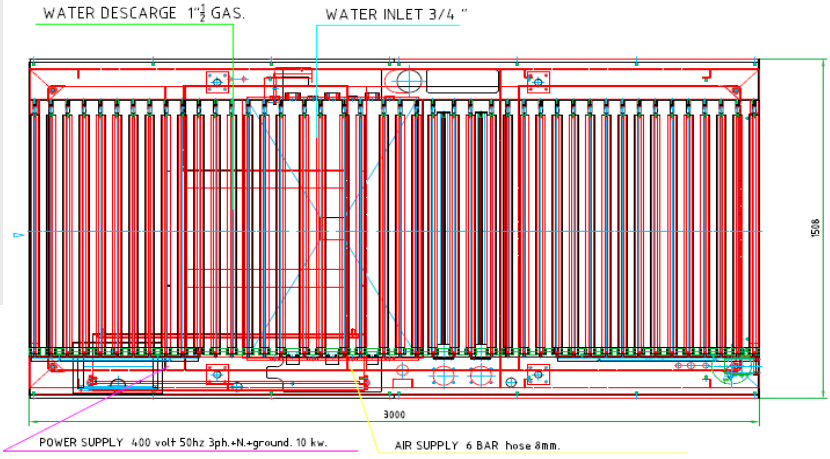

ALTEREGO CREATIVE

EMAR
GLASS

GLASS WORKING EQUIPMENT

www.emarglass.it

EMAR GROUP

EMAR GLASS, a division of **EMAR GROUP**

EMAR Srl - Via Del Lavoro 2/B - 20060 – Pozzo D'Adda (MI) - Italy
Phone +39 02 90967625 - E-mail: info@emar.it - www.emar.it